

086025



### Chain Hoist Revolution

1. This innovative and patented hand chain hoist is designed for heavy industrial applications.
2. This 360° rotating hand chain guide allows hoist operations from various angles and helps the operator stay out of the danger zone.
3. Premium brake system ensures safe operation, low maintenance and is extremely quiet.
4. Sealed Roller Bearings



#### a. Easy to install


Compact design and low headroom make the Series simple to install even in confined working areas. No adjustments necessary.

#### b. Low maintenance

Enclosed housing allows outdoor use. The load brake requires no lubrication.

#### c. Quality features

1. Wheel cover with guide slots guard against jamming and slipping of chain.
2. Forged swivel hooks and latches prevent twisting of chain and reduce unintentional unhooking of the unit or the load.
3. Chain guide and stripper ensures proper fit of chain over pocket wheel.
4. Two-stage gear reduction with hardened gears and pinion.

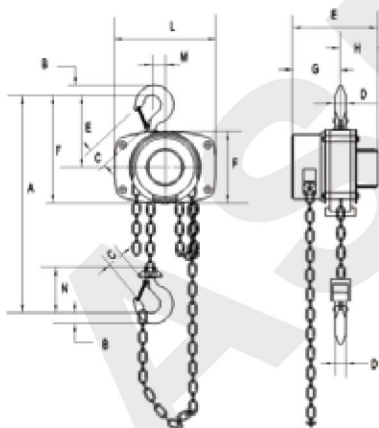

Item No	Load Rating (Tons)	Lift (m)	Net Weight (kg)	Hand Chain Pull to Lift Rated Load (kg)	Hand Chain Overhauled to Lift Load One Foot (M)	Dimensions(mm)					
						A	B	C	D	E	F
SCH/360-0050.0250	1 / 2	2.50	8.9	19.95	9.14	300	17.5	25	12	160	134
SCH/360-0050.0300		3.00	9.5								
SCH/360-0050.0600		6.00	10.6								
SCH/360-0100.0250	1	2.50	13.0	24.49	13.90	355.6	22.2	28.6	14.3	176	155.6
SCH/360-0100.0300		3.00	13.9								
SCH/360-0100.0600		6.00	15.8								
SCH/360-0200.0250	2	2.50	20.0	33.56	21.64	395	30	35	20.6	203	182.5
SCH/360-0200.0300		3.00	21.6								
SCH/360-0200.0600		6.00	24.8								
SCH/360-0300.0250	3	2.50	27.1	41.73	30.60	520	38	39.7	25.4	224	220
SCH/360-0300.0300		3.00	30.6								
SCH/360-0300.0600		6.00	35.9								
SCH/360-0500.0250	5	2.50	38.0	34.47	53.03	682	44.5	47.6	30	224	220
SCH/360-0500.0300		3.00	43.3								
SCH/360-0500.0600		6.00	53.8								
SCH/360-1000.0250	10	2.50	71.0	46.26	79.55	825	68	68	39.6	224	220
SCH/360-1000.0300		3.00	79.4								
SCH/360-1000.0600		6.00	4.0								