


086020



Technical Benefits

1. Forged and Heat Treated load Hooks with batch traceability and stretch indicators
2. Double Pawls supporting fail-safe brake mechanism. Even if by any chance one of the two pawls becomes unserviceable, the other will still remain operative, and the brake system remains secure.
3. Asbestos free Brake Linings
4. Forged Safety latch with manufacture mark
5. Individually proofload tested to 1.5 X WLL with individual serial number
6. Lightweight yet durable
Steel frame construction is rugged yet lightweight and easy to handle.
7. Low maintenance
Enclosed housing allows outdoor use. The load brake requires no lubrication.
8. Quality features
 - a. Wheel cover with guide slots guards against jamming and slipping of chain.
 - b. Forged swivel hooks with latches prevent twisting of chain and reduce unintentional unhooking of the unit or the load.
 - c. Chain guide and stripper ensure proper fit of chain over pocket wheel.
 - d. Two-stage gear reduction with hardened gears and pinion.

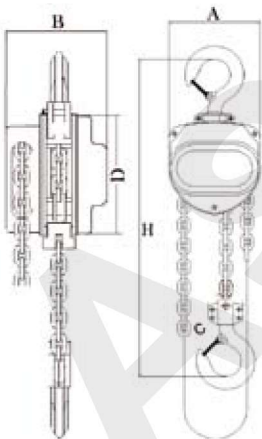

Product code	Capacity Ton	Standard lift(m)	Test load Ton	Pulling Efforts kg	Chainfall NO.	Load chain Dia(mm)	Dimensions(mm)				Net weight kg
							A	B	C	D	
SCH/A2-0050.0300	0.5	3.0	0.75	22	1	6	125	111	24	134	9.0
SCH/A2-0100.0300	1.0	3.0	1.50	31	1	6	147	126	28	154	11.2
SCH/A2-0150.0300	1.5	3.0	2.25	35	1	8	183	141	34	192	15.3
SCH/A2-0200.0300	2.0	3.0	3.00	30	1	8	215	163	38	224	18.5
SCH/A2-0300.0300	3.0	3.0	4.50	35	2	8	183	141	38	192	27.0
SCH/A2-0500.0300	5.0	3.0	7.50	39	2	10	215	163	48	224	42.0
SCH/A2-1000.0300	10.0	3.0	12.50	41	4	10	360	163	64	224	83.0
SCH/A2-2000.0500	20.0	5.0	25.00	41 X 2	8	10	585	191	82	224	197.4
SCH/A2-3000.0500	30.0	5.0	37.50	47 X 2	12	10	705	485	75	85	458.0
SCH/A2-5000.0500	50.0	5.0	62.50	47 X 2	24	10	746	660	110	128	1300.0