


086017



Technical Features

1. Forged and Heat Treated load Hooks with batch traceability and stretch indicators
2. 360° handle rotation with stroke to ratchet indicators
3. Double pawl Brake system
4. Asbestos free Brake Linings
5. Sealed Roller Bearings
6. 100% Load Tested to 1.5xWLL
7. MBL of 400% of WLL
8. 2000 Cycle Batch Test

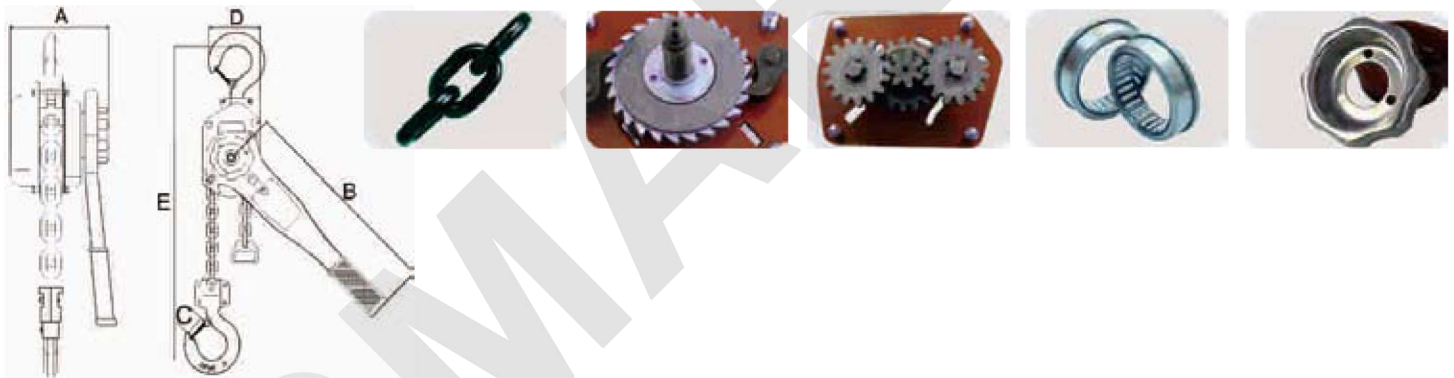

Product code	Capacity Ton	Standard lift(m)	Test load Ton	Pulling Efforts kg	Chainfall NO.	Load chain Dia(mm)	Dimensions(mm)					Net weight kg
							A	B	C	D	E	
SLH/A2-0050.0150	0.50	1.5	0.75	10	1	5	148	280	45	96	325	5.9
SLH/A2-0075.0150	0.75	1.5	1.13	14	1	6	148	280	45	96	325	6.6
SLH/A2-0100.0150	1.00	1.5	1.50	16	1	6	148	280	48	96	325	6.8
SLH/A2-0150.0150	1.50	1.5	2.25	22	1	8	172	410	52	110	380	10.8
SLH/A2-0200.0150	2.00	1.5	3.00	26	1	8	172	410	60	110	380	11.1
SLH/A2-0300.0150	3.00	1.5	4.50	32	1	10	195	410	66	145	480	18.2
SLH/A2-0600.0150	6.00	1.5	9.00	34	2	10	195	410	80	145	480	28.1
SLH/A2-0900.0150	9.00	1.5	11.25	34	3	10	195	410	94	155	510	38.0