




## Shortening Components **XL**

### The **Clevis Shortening Claw TWN 1851**

proven over many decades, has been further developed into the Grade **XL** and its clevis is designed to the corresponding nominal size. The chain has a safe seat in the claw pocket so that premature release will be avoided at any time.

100% Magnetic Crack Tested. BG-approved.

Finish: RAL 5002

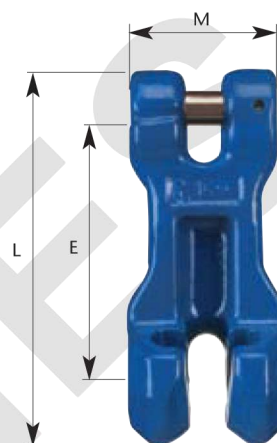


Trade Size	Article-No.	Nominal Size [mm]	Working Load Limit [t max]	Dimensions [mm]			Weight approx. [kgs]
				E	L	M	
<b>6-XL</b>	F34904	6	1,40	54	81	32	0,21
<b>8-XL</b>	F34924	8	2,50	80	115	46	0,61
<b>10-XL</b>	F34934	10	4,00	90	134	56	0,96
<b>13-XL</b>	F34944	13	6,70	117	175	72	2,00
<b>16-XL</b>	F34954	16	10,00	144	214	86	3,57

The **RAPID-Shortening Claw TWN1852** can be assembled and disassembled fast and easily with no additional tools. The ergonomic and compact design enables its positioning at any place on the chain. Two robust locking devices avoid the unsafe release of the chain in a loaded or unloaded condition. The locking device is equipped with a robust spring system.

100% Magnetic Crack Tested. BG-approved.

Finish: RAL 5002

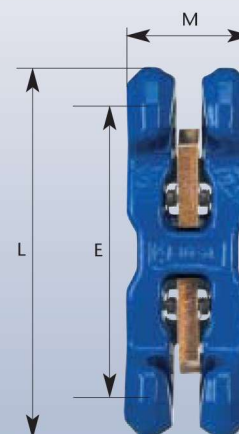

Trade Size	Article-No.	Nominal Size [mm]	Working Load Limit [t max]	Dimensions [mm]			Weight approx. [kgs]
				E	L	M	
<b>6-XL*</b>	F34765	6	1,4	-	-	-	-
<b>8-XL</b>	F34775	8	2,5	111	148	48	0,79
<b>10-XL</b>	F34780	10	4,0	134	180	60	1,50
<b>13-XL</b>	F34785	13	6,7	179	240	78	2,70
<b>16-XL</b>	F34790	16	10,0	222	296	96	4,80

\*In development