

CHAIN BLOCK

FEATURES and ADVANTAGES

- Alloy steel components with special heat treatment, avoiding sudden break.
- Automatic Double Pawl Braking System
- Asbestos Free Friction Disc
- Industrial Powder Coating meet RoHS requirement
- 1500 Cycles life test, Meet JBT7334, EN13157, ANSI B30.16, AS1418 Standards

OPTIONAL FEATURES WITH EXTRA COST



Independent Overload Protection System



Captured Bearing to reduce the pulling force



Large Throat Opening Hook



Trust Bearing in bottom hook assembly



Casting End Stop




Zinc Plated Load Chain

ASMARINES


Contact Us:

WHATSAPP
0857-7730-4523


CALL
(021) 691 9595




0.5T-2T



3T,5T

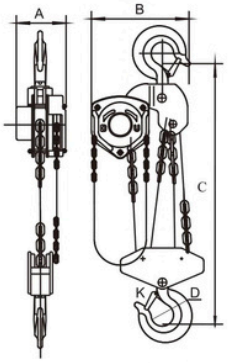

10T,15T

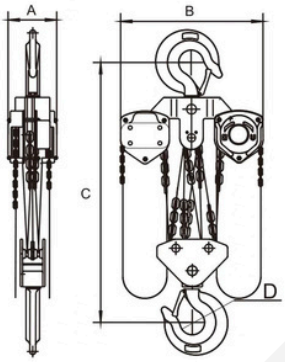

20T







Model		622A-0.5	622A-1	622A-1.5		622A-2		622A-3		622A-5		622A-7.5	622A-10		622A-15	622A-20		622A-30
Capacity	tons	0.5	1	1.5	1.5	2	2	3	3	5	5	7.5	10	10	15	20	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Running test load	KN	7.5	15	22.5	22.5	30	30	45	45	75	75	112.5	150	150	225	300	300	450
Effort required to lift rated load	N	225	300	310	350	300	310	350	370	400	415	415	410	415	420	410*2	410*2	410*2
Diameter of load chain	mm	5	6	7.1	8	6	8	7.1	8	9	10	10	9	10	10	9	10	10
Strands of load chain		1	1	1	1	2	1	2	2	2	2	3	4	4	6	8	8	12
Dimensions (mm)	A	132	152	152	155	152	185	152	155	185	189	189	185	189	194	220	224	274
	B	152	157	180	180	170	207	207	207	267	267	380	380	380	400	440	440	649
	C	315	355	375	375	405	430	500	500	680	680	650	750	750	880	940	940	1100
	D	34	38	48	48	48	48	50	50	57	57	72	80	80	85	106	106	120
	K	27	27	36	36	36	36	38	38	48	48	47	51	51	58	70	70	80
Net weight	kg	8.5	11	13.5	14.5	14.5	17.5	20.5	23	36.5	39.5	44	60	65	102	146	156	246
Packing measurement	cm	24.5x19x18	26x19x19	30.5x21x19		31x20x19	30x23.5x23	34x24x19		49x29x23		47x42x23	47x42x22		97x48x23	80x70x24	80x70x23	80x70x37
Extra weight per metre of Extra lift	kg	1.3	1.6	2	2.3	2.2	2.3	3.2	3.7	4.5	5.3	7.5	8.1	9.7	14	16.2	19.3	28.2

Contact Us:

WHATSAPP
0857-7730-4523

CALL
(021) 691 9595