

LEVER BLOCK

FEATURES and ADVANTAGES

- Automatic Double Pawl Braking System
- Asbestos Free Friction Disc
- Industrial Powder Coating meet RoHS requirement
- 1500 Cycles lift test, Meet JBT7334, ANSI B30.16, AS1418 Standards





OPTIONAL FEATURES WITH EXTRA COST



Shipyard hook



Cast enlarged end ring


ASMARINES


Contact Us:

WHATSAPP
0857-7730-4523

CALL
(021) 691 9595



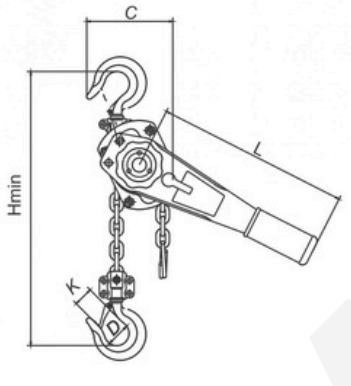





Model		HSH620-2.5	HSH620-5	HSH620-7.5	HSH620-10	HSH620-15	HSH620-20	HSH620-30	HSH620-60	HSH620-90
Capacity		0.25	0.5	0.75	1	1.5	2	3	6	9
Standard lift		1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load		3.75	7.5	11.2	15	22.5	30	45	75	112.5
Effort required to lift rated load		250	340	140	185	230	251	285	385	390
Strands of load chain		1	1	1	1	1	1	1	2	3
Diameter of load chain		4	5	6	6	7.1	8	10	10	10
Dimensions (mm)	A	92	105	153	153	166	175	195	195	195
	B	72	78	86	96	100	105	112	112	112
	C	85	80	130	130	150	160	202	242	312
	D	30	35	38	38	48	48	50	65	81
	H	230	260	295	295	335	385	450	550	660
	L	160	300	315	315	365	368	365	365	365
	K	25	25	27	27	36	36	38	48	54
Net weight		1.8	4	7.5	7.5	9.5	15.5	16.5	27	40
Packing measurement		22x18x11	37x12x11	33x18x18.5	33x16x13	45.5x20x20.5	45.5x20x20.5	48x22x23	50.5x23x23	48.5X32.5X25
Extra weight per metre of Extra lift		0.41	0.52	0.8	0.8	1.1	1.4	1.8	3.6	5.4

Contact Us:

WHATSAPP
0857-7730-4523

CALL
(021) 691 9595