

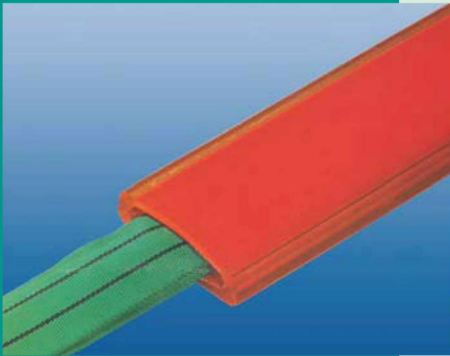


Corner protection for lifting slings and roundslings



Technotex BV protection sleeve for lifting slings

- For use in extreme conditions.
- One- or two-sided coating.

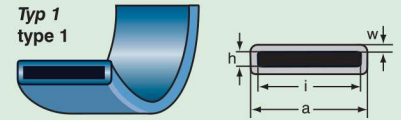

type	for slings up to webbing width (mm)	for roundslings up to WLL (kg)	weight per meter 1-sided gr	weight per meter 2-sided gr	interior (mm)	exterior (mm)	interior height (mm)	thickness of material (mm)
50 / 40 / 10 / 5	30	-	60	100	40	50	10	5
70 / 60 / 12 / 5	50	1 t / 2 t	80	135	60	70	12	5
80 / 70 / 12 / 5	60	3 t / 4 t	90	150	70	80	12	5
95 / 85 / 12 / 5	75	5 t	100	170	85	95	12	5
110 / 100 / 12 / 5	90	6 t	105	175	100	110	12	5
120 / 110 / 12 / 5	100	8 t	125	205	110	120	12	5
145 / 135 / 12 / 5	125	10 t	145	240	135	145	12	5
170 / 160 / 12 / 5	150	-	170	280	160	170	12	5
200 / 190 / 12 / 5	180	-	190	320	180	190	12	5
290 / 280 / 15 / 8	250	12 t / 15 t	425	710	280	290	15	8
330 / 320 / 15 / 8	300	20 t	485	805	320	330	15	8

Technotex BC polyurethane coating fixed on a webbing sling

- Elastic and abrasion resistant.
- For use in extreme conditions.
- One- or two-sided coating.



Technotex protection sleeves and corner pieces

Protection systems for lifting slings, roundslings and lashings are especially desired when lifting items with coarse surfaces or sharp edges.

