

VLC SV PLUS VERTICAL LIFTING CLAMP



BENEFITS:

1. Long product life
2. Meets standard BS En13155
3. Guaranteed performance
4. All forged and heat treated Parts
5. Safety and Reliability with individual serial number
6. Easily disassembled and reassembled
7. Permanent PI code for good Traceability

APPLICATIONS:


Standard VLC clamp is designed for vertical lifting and turning over of plates, the clamp possesses a safety device by which the lock is not disengaged even if the lifting rope is slackened. This clamp can be applied for a wide range of works which maintains a structure for safety against ground-touching shocks of the loads.

WORKING FIELDS

- Shipyards
- Subway sites
- Construction sites
- Metal Production Workshop

- Max.load:1-5 tons Range
- Jaw Opening:0-50 mm
- Safety factor:6 times
- Safety latch mechanism

- Vertical lifting of flat plates
- Turning over of flat plates
- Lifting of shaped steels

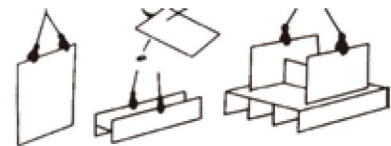

Item No	WLL (ton)	Opening (mm)	Dimensions(mm)										Weight (kg)
			A	B	C	D	E	F	G	H	I	J	
VLC1	1	0-22	24	32	123	46	22	274	29	142	52	12	4.5
VLC2	2	0-32	35	42	152	50	25	302	38	188	63	14	7.0
VLC3	3	0-36	38	48	170	58	35	360	45	203	68	19	11.0
VLC5	5	0-50	52	54	220	62	58	458	58	236	76	20	17.2